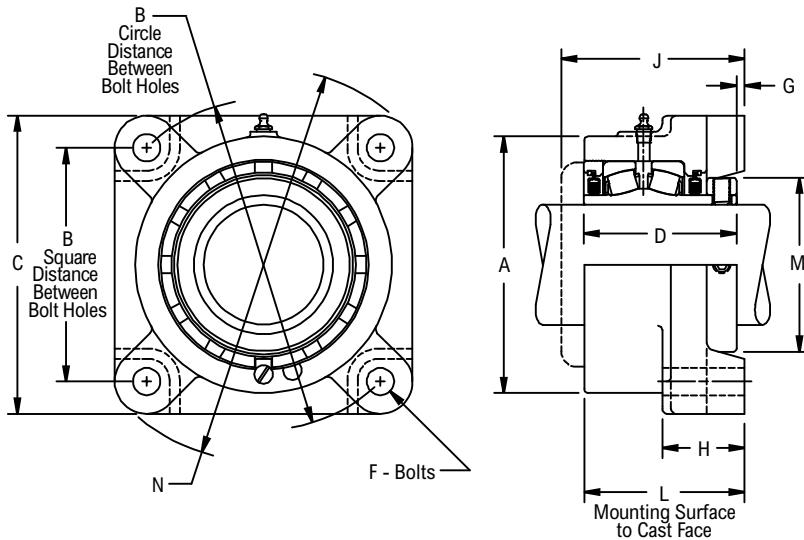


EFRB22400

Photo Shows a 4-Bolt Spherical Roller Bearing Flanged Unit

Product Features

Self aligning type E interchange
Corrosion-resistant powder coating
Cast iron housing
Misalignment capabilities - total of 4°
Broad range of sealing options
Factory set clearance & lubrication
Hardened spring locking collar
Field interchangeable seals
See Features & Benefits for additional info.

**Bearing Dimensions**

Size Code	Shaft Diameter	Part Number	B Distance Between Bolt Holes		L Mounting Surface to Cast Face	A	C	D	F Bolts	G	H	J	M	N	Approx. Weight	
			Square	Circle												
B424	1 7/16	EFRB22423H	3 1/2	4 61/64	2 31/32	3 11/16	4 5/8	2 7/8	1/2	1/16	1 3/8	4 1/32	2 5/16	6 1/16	8.00	
	35.00	EFRB224M35H	88.90	125.81	75.40	93.70	117.50	73.02	12.00	1.60	34.90	102.40	58.70	154.00	3.40	
B428	1 1/2	EFRB224B24H	4 1/8	5 53/64	3 9/32	4 1/4	5 3/8	3 1/8	1/2	1/8	1 7/16	4 9/32	2 19/32	7 7/32	11.00	
	1 5/8	EFRB22426H													10.00	
	1 11/16	EFRB22427H													5.10	
	40.00	EFRB224M40H				104.80	148.03	83.30	108.00	136.50	79.38	12.00	3.20	36.50	108.70	65.90
B432	1 3/4	EFRB224B28H	4 3/8	6 3/16	3 9/32	4 1/2	5 5/8	3 1/8	1/2	1/8	1 7/16	4 5/16	2 7/8	7 5/16	11.00	
	1 15/16	EFRB22431H													10.00	
	2	EFRB22432H													5.30	
	45.00	EFRB224M45H				111.10	157.18	83.30	114.30	142.90	79.38	12.00	3.20	36.50	109.50	73.00
B436	50.00	EFRB224M50H	55.00	EFRB224M55H	123.80	175.03	88.90	127.00	158.80	84.14	16.00	3.20	39.70	117.50	82.60	210.30
	55.00	EFRB224M55H														7.10
B440	2 1/4	EFRB224B36H	5 3/8	7 19/32	3 23/32	5 1/2	6 7/8	3 1/2	5/8	3/16	1 23/32	4 15/16	3 9/16	8 31/32	18.00	
	2 7/16	EFRB22439H													17.00	
	2 1/2	EFRB22440H													11.00	
B448	60.00	EFRB224M60H	136.50	192.89	94.50	139.70	174.60	88.90	16.00	4.80	43.70	125.40	90.50	227.80	7.90	
	2 11/16	EFRB22443H	6	8 31/64	4 7/32	6 1/2	7 3/4	4	3/4	3/16	1 25/32	5 13/32	4 1/16	10 1/8	26.00	
	2 3/4	EFRB22444H													25.00	
	2 15/16	EFRB22447H													24.00	
	3	EFRB22448H													11.70	
	65.00	EFRB224M65H	152.40	215.49	107.20	165.10	196.90	101.60	20.00	4.80	45.20	137.30	103.20	257.20	11.50	
	70.00	EFRB224M70H													11.00	
	75.00	EFRB224M75H													18.90	
B456	3 3/16	EFRB22451H	7	9 59/64	4 21/32	7 3/8	9 1/4	4 3/8	3/4	1/4	1 31/32	5 3/4	4 29/32	11 21/32	42.00	
	3 7/16	EFRB22455H													41.00	
	3 1/2	EFRB22456H													40.00	
	80.00	EFRB224M80H				177.80	251.23	118.30	187.30	235.00	111.12	20.00	6.40	50.00	146.00	124.60
B464	85.00	EFRB224M85H	196.80	278.21	138.90	247.65	247.65	128.59	24.00	6.40	56.40	168.30	142.90	329.40	18.40	
	3 11/16	EFRB22459H													58.00	
	3 15/16	EFRB22463H													56.00	
	4	EFRB22464H													27.20	
	90.00	EFRB224M90H													25.40	

Additional Notes

Please call 1-866-REXNORD for availability

Lubrication fitting tap size, 1/8 in PT

H labyrinth seals standard

All size codes available with type E lip seals & E7 triple lip seals

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt Spherical Roller Bearings Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.