


Round




Photo Shows an Unmounted Square Bore Ball Bearing Unit

Product Features


- Spherical or Cylindrical O.D.
- Triple lip seals
- Optional relubrication feature
- See Features & Benefits for additional info.

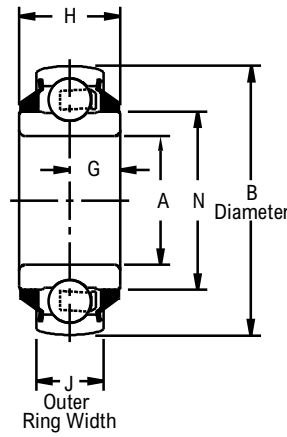

Style 1

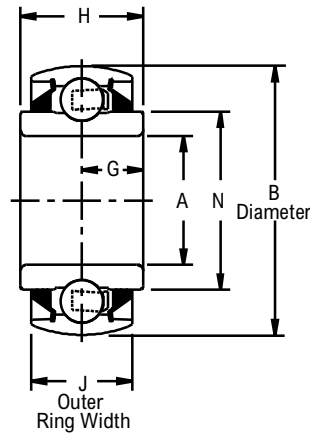

Style 2

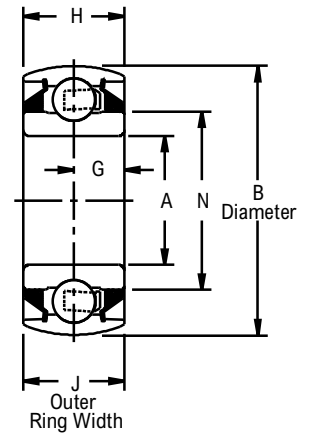


Style 3

*Note: Drawing represents spherical O.D. bearing

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	Industry Number	Style	B O.D.	J Outer Ring Width	A	G	H	N	Y	Approx. Weight
Non-relubricatable												
Cylindrical												
208	1 ³ / ₁₆	19RB208E3 Δ	W208PP7	1	3.1496	0.7087	1.1880	0.594	1.1875	2.083	-	1.30
		19RB3208E3 Δ	W208PP4	3		1.1875						1.50
	1 ¹ / ₂	24RB6208E3 Δ	W208PP2	2		0.8268	1.5005	0.844	1.6875			1.50
		24RB8208E3 Δ	W208PP10	1								1.50
210	1 ¹⁵ / ₁₆	31RB3210E3 Δ	W210PP2	3	3.5433	1.1875	1.9380	0.594	1.1875	2.475	-	1.50
211	2 ³ / ₁₆	35RB3211E3 Δ	W211PP2	3	3.9370	1.3125	2.1880	0.656	1.3125	2.749	-	2.25
Spherical												
208	⁷ / ₈	14R4208E3 Δ	W208PPB14	2	3.4380	1.1875	0.8900	0.719	1.4375	2.083	-	1.30
	1 ³ / ₁₆	19R208E3 Δ	W208PPB7	1	3.1496	0.7087	1.1880	0.594	1.1875			
		19R3208E3 Δ	W208PPB4	3		1.1875						1.5005
		1 ¹ / ₂	24R6208E3 Δ	W208PPB2		2		1.5005	0.844			1.6875
209	1 ¹ / ₂	24R3209E3 Δ	W209PPB4	3	3.3465	1.1875	1.5350	0.594	1.1875	2.281	-	1.50
		24R4209E3 Δ	W209PPB6	2	3.4380				0.719			1.4375
	45.00	R3209E3 Δ	W209PPB2	3	85.0000	30.1620	45.0000	15.080	30.1620	57.940	0.60	
210	1 ³ / ₄	28R3210E3 Δ	W210PPB5	3	3.5433	1.1875	1.7850	0.594	1.1875	2.475	-	1.60
	1 ¹⁵ / ₁₆	31R3210E3 Δ	W210PPB2				1.9380					1.50
211	2 ³ / ₁₆	35R3211E3 Δ	W211PPB2	3	3.9370	1.3125	2.1880	0.656	1.3125	2.749	-	2.25

Continued...

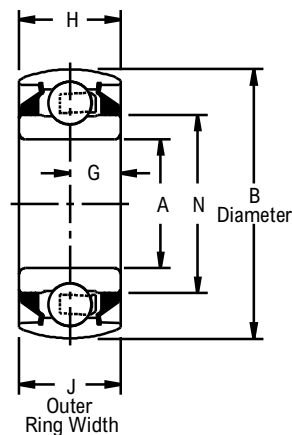

Style 3

Continued...

*Note: Drawing represents spherical O.D. bearing

Bearing Dimensions

Size Code	Shaft Diameter	Part Number	Industry Number	Style	B O.D.	J Outer Ring Width	A	G	H	N	Y	Approx. Weight
Relubricatable												
Cylindrical												
210	1 ³ / ₈	22RBG3210E3 Δ	GW210PP3	3	3.5433	1.1875	1.4065	0.594	1.1875	2.475	0.255	1.40
	1 ¹⁵ / ₁₆	31RBG3210E3 Δ	GW210PP2				1.9380					1.50
211	1 ⁵ / ₈	26RBG3211E3 Δ	GW211PP4	3	3.9370	1.3125	1.6600	0.656	1.3125	2.749	0.267	1.60
	2 ³ / ₁₆	35RBG3211E3 Δ	GW211PP2				2.1880					2.25
Spherical												
209	1 ¹ / ₂	24RG3209E3 Δ	GW209PPB4	3	3.3465	1.1875	1.5350	0.594	1.1875	2.281	0.248	1.50
	45.00	RG3209E3 Δ	GW209PPB2		85.0000	30.1620	45.0000	15.080	30.1620	57.940	6.300	0.60
210	1 ³ / ₈	22RG3210E3 Δ	GW210PPB3	3	3.5433	1.1875	1.4065	0.594	1.1875	2.475	0.255	1.40
	1 ³ / ₄	28RG3210E3 Δ	GW210PPB5				1.7850					1.60
	1 ¹⁵ / ₁₆	31RG3210E3 Δ	GW210PPB2				1.9380					1.50
211	1 ⁵ / ₈	26RG3211E3 Δ	GW211PPB4	3	3.9370	1.3125	1.6600	0.656	1.3125	2.749	0.267	1.60
	2 ³ / ₁₆	35RG3211E3 Δ	GW211PPB2				2.1880					2.25

Additional Notes

Please call 1-866-REXNORD for availability

Unground spherical O.D. tolerance, +/- .005 in (+/- 0.13 mm).

Center portion of O.D. is cylindrical

Δ E3 triple lip seals standard

For the Selection Guide, Load Ratings and Speed Limits, see the Link-Belt 200 Series

Ball Bearing Engineering section

Note: Dimensions subject to change. Certified dimensions of ordered material furnished on request.